

## Clear Rigid Schedule 40 PVC Pipe


Clear-40®

The non-toxic compound used to manufacture Clear-40 is non-conductive and has a U.L. rating of 94 VO. Because Clear-40 is highly corrosion resistant as well as transparent, it is used extensively in chemical, pharmaceutical, food plants, and in laboratories and hospitals where visual contact with the flow is desired.

Clear-40 pipe can be used interchangeably with standard schedule 40 gray or white fittings.

Assemblies should be permanently glued using primer and solvent cement. Twenty-foot pipe lengths, bell-shaped pipe ends, fittings, and schedule 80 pipe are available through minimum order.

Clear-40 pipe is neither recommended to be threaded nor recommended for use in applications involving compressed air or gas. Although Clear-40 is completely transparent, it does have a blue tint.

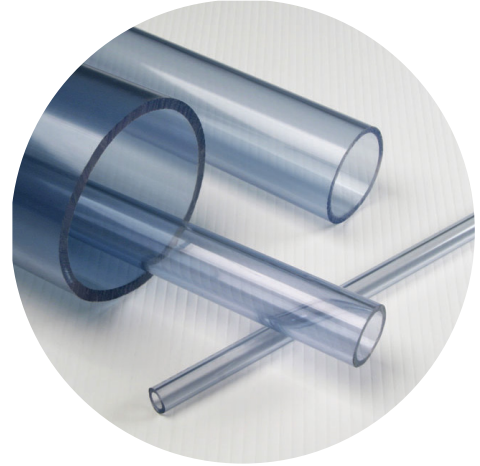

- Made from a clear, virgin, rigid compound to permit visual contact with the flow
- Non-toxic ingredients conform to FDA standards for use with food contact surfaces
- Smooth pipe interior surface provides excellent flow characteristics
- Flame retardant non-conductive
- Manufactured to schedule 40 dimensions compatible with standard PVC pipe, fittings, and valves
- Quick and easy glue-on installation with primer and cement

Part No.	Nom. Pipe		Min. Wall (in.)	OD (in.)	Std. Length (ft.)*	Max. W.P. @ 73°F (psi)	Lbs. per 10 (Ft.)
	Size (in.)	Avg. ID (in.)					
150 0030	1/4	.354	.088	.540	0.5118	390	.81
150 0170	1	1.033	.133	1.315	0.5512	220	3.15
150 0275	2	2.049	.154	2.375	0.7874	140	6.82