


Food Steam Hose

VTA

The V.T.A. is well-suited for hot water, steam, dosing etc. connections to food and cosmetic processing equipment. This very flexible and robust hose, produced with steel reinforcement, improves operator safety. The V.T.A. hose is manufactured in 60 meter lengths, and is ideal for hose-reel applications.

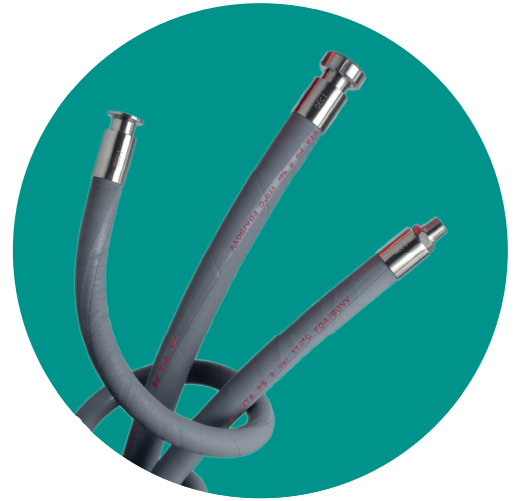

SPECIFICATIONS

Inner quality: White smooth butyl inner bore in accordance with FDA 21 CFR 1477 2600, BfR, Cytotoxicity test. Saturated steam-resistant

Reinforcement: Steel wiring embedded in the wall

Outer bore: Micro perforated grey Butyl

Working temperature: from -40°C to + 170°C



Product Number	I.D		O.D.		Working Pres. at 90°C		Working Pres. at 170°C		Bending Radius		Burst Pressure		Vacuum	
	Ins. diameter (mm.)	(in.)	Outs. Diameter (mm.)	(in.)	(Bar)	(PSI)	(Bar)	(PSI)	(mm.)	(in.)	(Bar)	(PSI)	(Bar)	(PSI)
VTA-0510	13	0.510	27.0	1.065	30	435	8	116	60	2.362	80	1.160	0.8	1.16
VTA-0630	16	0.630	30.0	1.181	30	435	8	116	100	3.937	80	1.160	0.8	1.16
VTA-0750	19	0.748	33.0	1.299	30	435	8	116	130	5.118	80	1.160	0.8	1.16
VTA-1000	25	1.000	39.5	1.555	30	435	8	116	160	6.299	80	1.160	0.8	1.16
VTA-1260	32	1.260	46.5	1.831	30	435	8	116	190	7.480	80	0.870	0.8	1.16
VTA-1500	38	1.496	52.0	2.047	30	435	8	116	220	8.661	80	0.870	0.8	1.16